

Rec'd PCT/PTO 29 DEC 2003



PCT/GB2003/002801



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 06 AUG 2003


WIPO PCI

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

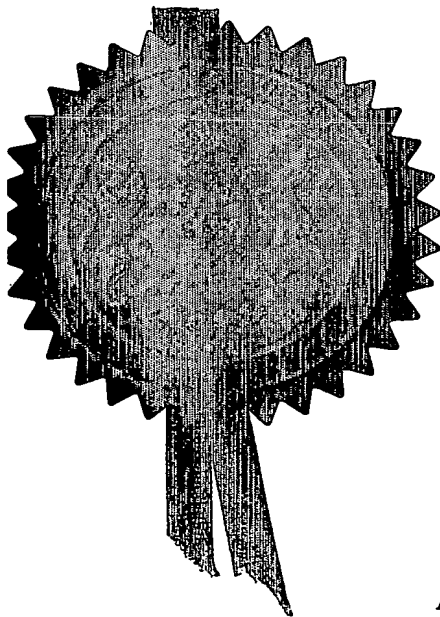

Signed

Stephen Hordley


Dated 15 July 2003

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

An Executive Agency of

BEST AVAILABLE COPY

The
Patent
Office

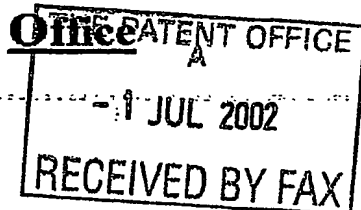

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales

01JUL02 E729955-1 NP403QQ
P01/7700 0.00-0215145.4

1. Your reference

11053P1 GB/CB

2. Patent application number

(The Patent Office will fill in this part)

0215145.4

01 JUL 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Reckitt Benckiser (UK) Limited
103 - 105 Bath Road
Slough
Berkshire
SL1 3UH
United Kingdom

Patents ADP number (if you know it)

07972136002 ✓

If the applicant is a corporate body, give the country/state of its incorporation

England

4. Title of the invention

Electrical Heated Vapour Dispensing Apparatus

5. Name of your agent (if you have one)

Craig M Bowers

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Reckitt Benckiser plc
Group Patents Department
Dansom Lane
HULL
HU8 7DS
UNITED KINGDOM

Patents ADP number (if you know it)

07799521001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application
(day / month / year)

Date of filing

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor; or
 - b) there is an inventor who is not named as an applicant; or
 - c) any named applicant is a corporate body.
- See note (d))

Yes

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	9
Claim(s)	4
Abstract	1
Drawing(s)	2

10. If you are also filing any of the following, state how many against each item.

Priority documents
 Translations of priority documents
 Statement of inventorship and right to grant of a patent (Patents Form 7/77)
 Request for preliminary examination and search (Patents Form 9/77)
 Request for substantive examination (Patents Form 10/77)
 Any other documents (please specify)

One

One

FS2

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

Craig M. Bowers

1 July 2002

12. Name and daytime telephone number of Person to contact in the United Kingdom

Craig Bowers (01482) 583730

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patents Office.

ELECTRICALLY HEATED VAPOUR DISPENSING APPARATUS

The present invention relates to an electrically heated vapour dispensing apparatus of the type commonly used for dispensing fragrancing materials and other volatile substances to an enclosed volume such as the interior of a room.

Electrically heated vapour dispensing apparatus of different types are known in the art. For example, GB 2 117 639 describes an air freshening device of the type which is plugged into an electrical mains socket. Whilst such "plug-in" apparatus provide a satisfactory volatilisation of fragrance, they have a number of disadvantages. Firstly, the devices must be plugged into an electrical socket in order to operate. Consequently, the electrical socket is unavailable for other uses. Secondly, the heating elements used in the apparatus need to operate continuously otherwise there is a performance drop. Consequently, the apparatus uses a large amount of electrical energy. In addition a user is prone to become 'habituated' to the fragrance - a phenomenon whereby exposure to a continuous presence of a fragrance leads one to become desensitised to the fragrance with the result that one can no longer detect the presence of the fragrance. Thirdly, such apparatus cannot be used where electrical mains sockets are not available, for example, in bathrooms, out-houses, etc. Fourthly, the majority of electrical mains sockets are located at or near ground level where the socket may be difficult to access or is obscured by items such as furniture. Locating the apparatus at or near ground level is not always considered ideal from an aesthetic consideration or for maximising the efficient volatilisation and diffusion of the fragrance in the enclosed volume of the room.

Attempts have been made to provide an electrically heated vapour dispensing apparatus which operates from a portable power supply, such as batteries. However, such apparatus suffer from two main drawbacks. Firstly, they are under-powered such that they have difficulty in heating the fragrance or other volatile substance to the required temperature, as well as heating the volatile substance sufficiently rapidly. Secondly, batteries are

not able to volatilise the fragrance for a long enough period to be acceptable to consumers. With many conventional apparatus the operating life of a battery power source would be only a matter of hours.

5 According to the present invention, there is provided an electrically heated apparatus for dispensing fragrancng materials and other volatile substances to an enclosed volume comprising a container containing a quantity of a volatile substance, heating means, transfer
10 means for transferring said volatile substance towards said heating means and a portable power supply for energising said heating means, characterised in that said heating means comprises a flexible thin film heater.

Embodiments of the present invention will now be
15 described, by way of example only, with reference to the accompanying drawings in which:-

Figure 1 is a schematic cross-sectional view through a first embodiment of electrically heated vapour
20 dispensing apparatus according to the present invention;

Figure 2 is a schematic cross-sectional view through a second embodiment of electrically heated vapour dispensing apparatus according to the present invention;

Figure 3 is a schematic cross-sectional view through
25 a third embodiment of electrically heated vapour dispensing apparatus according to the present invention;

Figure 4 is a schematic cross-sectional view through a fourth embodiment of electrically heated vapour dispensing apparatus according to the present invention;

30 Figure 5 is a plan view of a heating means for use in the apparatus of Figure 1 to 4; and

Figure 6 is a cross-sectional view of the heating means taken on line VI-VI of Figure 5.

35 Figure 1 shows a first embodiment of electrically heated vapour dispensing apparatus 1 which comprises a housing 2 containing a fragrance reservoir 4, a capillary tube 5, a porous element 6, heating means 7, control circuitry (not shown) and a portable power supply (not
40 shown).

The housing 2 has a planar base 9 allowing the apparatus 1 to be stood upright on a flat surface. The

housing 2 defines an interior 10 of the apparatus 1 in which the other components of the apparatus 1 are located. At or near an upper end of the housing 2 are provided a number of air holes 3 providing communication
5 between the interior 10 and the surrounding atmosphere. The air holes 3 allow volatilised fragrance to emanate from the interior 10.

The housing 2 may be formed from a thermoplastic or thermosetting polymeric material which has sufficient
10 heat tolerance such that it is not undesirably softened or melted when the heating means 7 is energised during normal use of the apparatus 1. Typical examples of known materials which would be suitable include polymers and/or co-polymer resin compositions based on:- nylons,
15 polyethylene terephthalate, polybutylene terephthalate, polyolefins, styrenes, polyacetal resins, polysulfones as well as other materials which exhibit the desired heat tolerance properties as noted above. As is well-known in the art, the polymeric compositions may include additives
20 or modifiers such as fillers, fire retardant materials, colourants, pigments, etc. Preferably, the housing is formed in an injection moulding process. Further, the housing 2 may be formed from glass.

The fragrance reservoir 4 is mounted in the interior
25 10 of the apparatus 1 and comprises a reservoir body 11 defining a closed volume 12 in which is stored a volume of the fragrance 14 to be volatilised. The fragrance 14 is typically a volatile liquid composition.

A lower end of the reservoir body 11 narrows to form
30 a neck portion 13 in which is located the capillary tube 5. The capillary tube 5 provides the sole outlet for the fragrance 14 to exit the reservoir 4.

The porous element 6 is located immediately below and in contact with the outlet of the capillary tube 5.
35 The porous element 6 may take various forms and shapes. The porous element 6 may be a porous polymeric material such as a sintered polymeric material or a porous ceramic material. Suitable materials include the range of porous plastics produced by Porex® (Fairbairn, Georgia, U.S.A.).
40 Alternatively, the porous element 6 may be a fibrous material such as a block, pad or sponge of compressed, woven or non-woven fibrous material. Exemplary fibrous

materials include naturally occurring synthetic fibrous materials as well as blends of two or more such fibrous materials.

The heating means 7 is located underneath the porous element 6 and in register therewith. In accordance with the present invention, the heating means 7 is a flexible, thin film heater. The thin film heater 7 is attached to the lower surface of the porous element 6 or otherwise held in contact therewith such that the porous element 6 is interposed between the capillary tube 5 and thin film heater 7.

As shown in Figures 5 and 6, the thin film heater comprises a laminate of three layers: an upper layer 21 of insulating material, a lower layer 23 of insulating material and an intermediate layer 22 of resistive material. The intermediate layer 22 of resistive material may be formed from a PTF material (polymer thick film) which preferably has PTC characteristics (positive co-efficient temperature) such that as the temperature of the resistive material 22 increases, the electrical resistance of the material also increases thus limiting the danger of over-currents and damage to the resistive material 22 and surrounding apparatus 1. The resistive material 22 is provided with contact portions 24 and 25 of conductive material to allow the resistive material 22 to be connected as part of an electrical circuit.

The resistive material 22 of the thin film heater 7 may be formed from a resistive ink or a resistive wire or a combination of the two. Resistive ink films are available from Hydor. Resistive wire films are available from Minco. The ink and/or wire is laid down in thin layers of the order of 40 to 50 microns on the flexible substrate of the insulating layers 21 and 23.

Advantageously, the resistive material 22 displays a very rapid thermal response on energisation. The time required for the resistive material 22 to reach an operating temperature of approximately 70 degrees Celsius can be of the order of one to two seconds. In addition the cooling time of the film is equally rapid.

Consequently, the thin film heater 7 is able to deliver a precise quantity of heat energy to the porous element 6 which allows for precise volatilisation of the fragrance

14. The operating temperature of the heater 7 can be adjusted depending on the nature and characteristics of the substance to be volatilised. For fragrances, typical temperatures are in the range 40 to 90 degrees Celsius,

5 more preferably, 60 to 80 degrees Celsius. For other substances such as insecticides higher temperatures may be required: in the range 100 to 160 degrees Celsius, more preferably 120 to 140 degrees Celsius, typically 130 degrees Celsius.

10 An important advantage of using a thin film heater as described above is that the heater may be formed as a flexible element and does not require a rigid substrate. Consequently, the thin film heater 7 may be manipulated to fit into a small volume and/or be positioned to
15 accommodate other components within the interior 10 of the apparatus 1. As such, the use of a thin film flexible heater allows for a smaller overall volume of apparatus 1. The use of a flexible heater also allows the spatial relationship of the heater 7 and porous
20 element 6 or other fragrance-bearing element to be easily adjusted in order to maximise thermal efficiency as described below in subsequent embodiments.

The portable power supply preferably comprises a battery cell or cells. The batteries may, for example,
25 be of the alkaline, lithium-ion or Ni-Cad type. The batteries may be disposable or rechargeable. The batteries may be rechargeable in situ by, for example, a solar cell or may be removable from the housing 2 to allow recharging by connection to a mains electrical
30 supply.

Control circuitry is provided in housing 2. The control circuit includes a switch and a timer. The switch operates to open and close an electric circuit comprising the portable power supply and thin film heater
35 7 and hence controls flow of electric current around the electrical circuit. Consequently, the switch controls energisation of the heater 7 and fragrance volatilisation. The switch is operated by the timer. The timer can be pre-programmed to open and close the switch
40 at specified times or to open and close the switch for set periods and at set intervals. For example, the apparatus 1 can be switched on for periods ranging

between one second and five minutes or more. Preferably, each period is between one second and one minute.

Alternatively, each period is between one second and ten seconds. Alternatively, each period is between one second
5 and five seconds.

Alternatively the timer may be programmed on demand by the user. For example, a selector switch may be provided to allow the user to adjust the period of energisation or the interval length between
10 energisations. The switch may also be opened and held opened by the user manually so as to place the apparatus 1 in an 'off' state. Alternatively a 'secondary', 'master', switch may be provided for this purpose.

An important advantage of using a switch and timer
15 is that the overall power requirement of the apparatus is reduced. This in turn allows the useful life of the apparatus 1 to be extended by increasing the length of time for which the apparatus 1 can operate between battery replacement or recharge. An added advantage is
20 that habituation to the fragrance is reduced since the fragrance is volatilised only for discrete periods and not continuously.

In use, a user switches the apparatus 1 on using the switch or master switch. Fragrance 14 from the reservoir
25 4 is drawn by capillary action down capillary tube 5 where it contacts and impregnates the porous element 6. The control circuit passes electric current from the battery to the thin film heater 7 as and when the timer operates the switch to close the electric circuit. On
30 energisation, the thin film heater 7 rapidly heats up to its operating temperature. Heat energy is passed from the thin film heater 7 to the porous element 6 by conduction. Consequently, the porous element 6 heats up leading to volatilisation of fragrance 14 impregnated
35 therein. The volatilised particles of fragrance then emanate through the air holes 3 into the surrounding atmosphere. Once the programmed energisation period has expired the control circuitry opens the switch turning the heater 7 off. The thin film heater 7 rapidly cools
40 leading to rapid cessation of fragrance emanation.

Figure 2 shows a second embodiment of apparatus 1 according to the present invention. As before, the

apparatus 1 comprises a housing 2 having air holes 3, a fragrance reservoir 4, control circuitry (not shown), portable power supply (not shown) and a thin film heater

7. The second embodiment is distinguished from the first

embodiment by the means of delivering the fragrance 14 into the vicinity of the thin film heater 7. A wick 30 is provided which extends externally from within the interior 12 of the fragrance reservoir 4. An upper end 31 of the wick 30 passes through an aperture 33 in the reservoir body 11 and extends therefrom. The thin film heater 7 is attached of held in contact with the upper end 31 of the wick 30. A capillary film may be used in substitution for the wick 30.

In use, operation of the portable power supply, control circuitry and thin film heater 7 is as described above with reference to the first embodiment. Fragrance 14 is wicked upwardly from within the reservoir 4 towards the upper end 31 of the wick 30. Energisation of the thin film heater 7 causes volatilisation of the fragrance which is then emanated though the air holes 3.

Advantageously, no capillary tube is required.

Figure 3 shows a third embodiment of apparatus 1 according to the present invention. As before, the apparatus 1 comprises a housing 2 having air holes 3, a fragrance reservoir 4, control circuitry (not shown), portable power supply (not shown) and a thin film heater 7. The third embodiment is distinguished from the previous embodiments by the means of delivering the fragrance 14 into the vicinity of the thin film heater 7.

A wick 40 is provided which extends externally from within the interior 12 of the fragrance reservoir 4. An upper end 41 of the wick 40 passes through an aperture 43 in the reservoir body 11 and extends therefrom. The wick 40 is cylindrical in shape and hollow. The wick 40 is preferably formed from a porous polymeric material or fibrous material. Suitable types of materials include those described above with reference to the porous element 6 of the first embodiment. The thin film heater 7 is attached of held in contact with the upper end 41 of the wick 40. Advantageously, the thin film heater 7 is formed as an elongate strip which is wrapped around an external surface of the cylindrical wick 40 in a spiral

arrangement. This serves to maximise the surface area of the wick 40 in proximity to the thin film heater 7 whilst minimising the quantity of resistive material 22 in the heater 7 and hence minimise the power requirements of the apparatus 1.

Operation of the third embodiment is the same as that of the embodiments described above.

Figure 4 shows a fourth embodiment of apparatus 1 according to the present invention. The fourth embodiment is similar to the third embodiment and in particular the wick 40 is in the form of a hollow cylindrical wick. The thin film heater 7 is inserted into a bore 44 of the wick 40 such that the heater 7 is surrounded by wick material. Advantageously heat generated by the heater 7 is efficiently conducted to the wick 40 due to the wick 40 forming a barrier such that the heat energy cannot easily emanate other than by conduction through the wick 40.

Whilst in the foregoing description the apparatus 1 has been described for use in volatising fragrance, it is to be understood that the apparatus is equally suitable for the volatilisation of other volatile substances which are desired to be emanated including, but not limited to, perfumes, disinfecting compositions and insecticides.

Whilst in the foregoing description the fragrance 14 has been typified as a liquid composition, other compositions may be utilised. These include gels, pastes and thixotropic liquids, as well as combinations of the same. The fragrance 14 may further comprise a liquid composition adsorbed onto a carrier element such as silica. The fragrance 14 may, in addition, be a bi-phase or multi-phase fragrance.

Whilst in the foregoing description the apparatus 1 has been described as for use with compositions such as fragrances, the apparatus may also be readily used in medical application for dispensing, for example, metered dosing of compounds such as aromatherapy compositions.

Whilst in the foregoing description the control circuitry has been described as switching the thin film heater 7 from an off state to an energised state the control circuitry can also be programmed to switch the thin film heater 7 from a 'low power' state to a 'high power' state. Thus constant emanation of the volatile

substance is achieved with the heater 7 in the low power setting whilst fragrance emanation is boosted at set intervals when the heater 7 is switched to the high power setting. This embodiment is advantageous where a strong

- 5 fragrance presence is required. This effect may also be achieved wherein the volatile substance is allowed/caused to emanate when the thin film heater is in an off state, with fragrance emanation being boosted (preferably at set/chosen intervals) by switching the thin film heater
- 10 to an energised state.

Claims:

1. An electrically heated apparatus for dispensing
5 fragrancing materials and other volatile
 substances to an enclosed volume comprising a
 container containing a quantity of a volatile
 substance, heating means, transfer means for
10 transferring said volatile substance towards said
 heating means and a portable power supply for
 energising said heating means, characterised in
 that said heating means comprises a flexible thin
 film heater.
2. Electrically heated apparatus as claimed in claim
15 1 wherein said thin film heater comprises a
 laminar of resistive material.
3. Electrically heated apparatus as claimed in claim
20 2 wherein the resistive material is a polymer
 thick film material or a polymer thin film
 material.
4. Electrically heated apparatus as claimed in claim
25 2 or claim 3 wherein the resistive material has
 positive temperature coefficient characteristics.
5. Electrically heated apparatus as claimed in any of
30 claims 2 to 4 wherein the thin film heater
 comprises a laminate having at least one laminar
 of resistive material and at least one laminar of
 insulating material.
6. Electrically heated apparatus as claimed in claim
35 5 wherein the laminate comprises two insulating
 laminars attached to opposed surfaces of the
 resistive material laminar.
7. Electrically heated apparatus as claimed in any of
40 claims 2 to 6 wherein the resistive material is
 formed at least partially from resistive ink.

8. Electrically heated apparatus as claimed in and of claims 2 to 7 wherein the resistive material is formed at least partially from resistive wire.

5 9. Electrically heated apparatus as claimed in claim 7 or claim 8 wherein the laminar of resistive material is formed from one or more layers of resistive ink and/or resistive wire each layer having a thickness of between 10 and 1000 microns.

10 10. Electrically heated apparatus as claimed in claim 7 or claim 8 wherein the laminar of resistive material is formed from one or more layers of resistive ink and/or resistive wire each layer having a thickness of between 10 and 100 microns.

15 11. Electrically heated apparatus as claimed in claim 7 or claim 8 wherein the laminar of resistive material is formed from one or more layers of resistive ink and/or resistive wire each layer having a thickness of between 20 and 50 microns.

20 12. Electrically heated apparatus as claimed in any preceding claim wherein the thin film heater has an overall thickness of between 20 and 1000 microns.

25 13. Electrically heated apparatus as claimed in any preceding claim wherein the thin film heater has an overall thickness of between 40 and 100 microns.

30 14. Electrically heated apparatus as claimed in any preceding claim wherein the portable power supply comprises one or more battery cells.

35 15. Electrically heated apparatus as claimed in claim 14 wherein the battery cell or cells are rechargeable.

40

16. Electrically heated apparatus as claimed in any preceding claim wherein said transfer means comprises a capillary tube.
- 5 17. Electrically heated apparatus as claimed in any of claims 1 to 15 wherein said transfer means comprises a wick or capillary film.
- 10 18. Electrically heated apparatus as claimed in claim 17 wherein said heating means is attached to or held in proximity to said wick or capillary film.
- 15 19. Electrically heated apparatus as claimed in claim 18 wherein said heating means is located at least partially within said wick.
- 20 20. Electrically heated apparatus as claimed in claim 19 wherein said wick is cylindrical and said heating means is located in a bore of the cylinder.
- 25 21. Electrically heated apparatus as claimed in claim 18 wherein said heating means is wrapped at least partially around an outer surface of said wick.
- 30 22. Electrically heated apparatus as claimed in any preceding claim further comprising timing means operable to energise said heating means periodically.
- 35 23. Electrically heated apparatus as claimed in claim 22 wherein the periodicity is pre-programmed.
24. Electrically heated apparatus as claimed in claim 22 wherein the periodicity is user defined.
- 40 25. Electrically heated apparatus as claimed in any of claims 22 to 24 wherein each period of energisation is for between 1 second and 5 minutes.

26. Electrically heated apparatus as claimed in any of claims 22 to 24 wherein each period of energisation is for between 1 second and 1 minute.
- 5 27. Electrically heated apparatus as claimed in any of claims 22 to 24 wherein each period of energisation is for between 1 second and 10 seconds.
- 10 28. Electrically heated apparatus as claimed in any of claims 22 to 24 wherein each period of energisation is for between 1 second and 5 seconds.
- 15 29. Electrically heated apparatus as claimed in any preceding claim further comprising timing means operable to switch said heating means periodically from a low power state to a high power state.
- 20 30. Electrically heated apparatus substantially as hereinbefore described with reference to or as shown in the accompanying drawings.

ABSTRACT

5 The invention comprises an electrically heated
apparatus for dispensing fragrancing materials and
other volatile substances to an enclosed volume.
The apparatus comprises a container containing a
quantity of a volatile substance, heating means,
transfer means for transferring said volatile
10 substance towards said heating means and a
portable power supply for energising said heating
means. The heating means comprises a flexible
thin film heater.






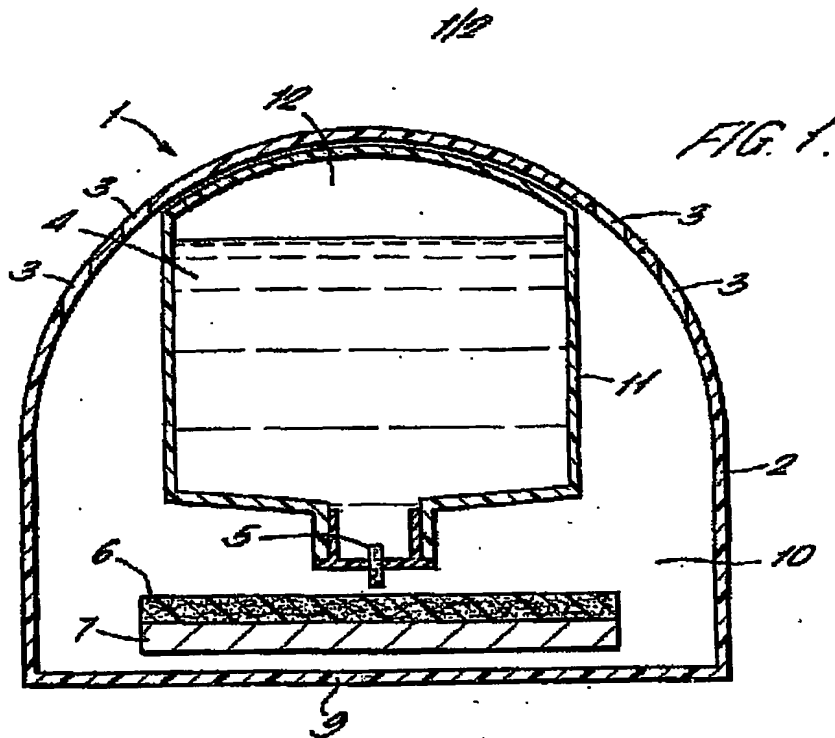


FIG. 2.

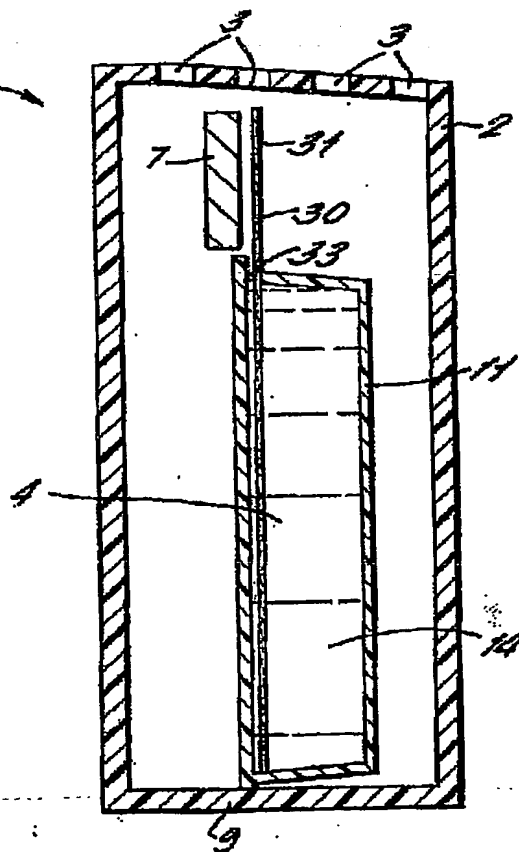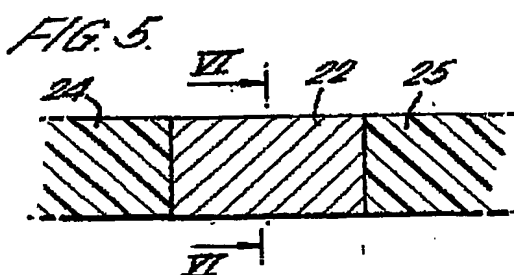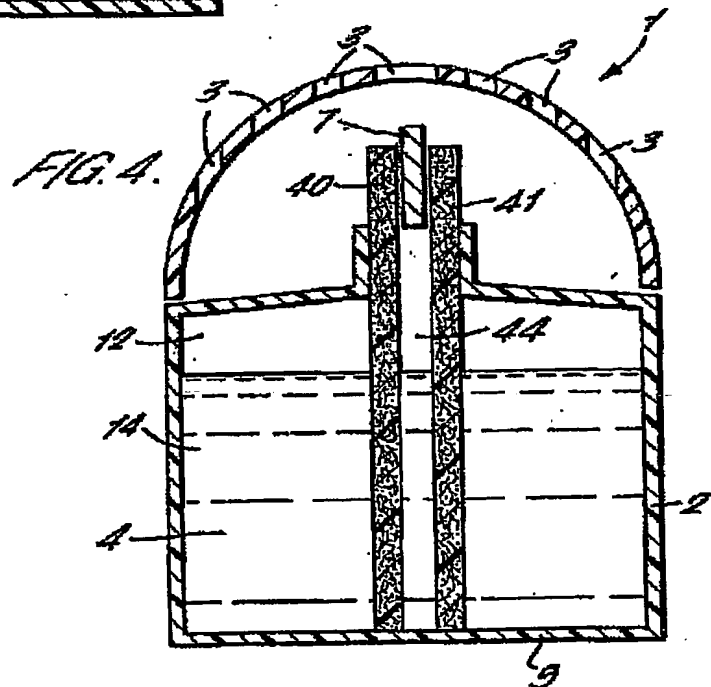

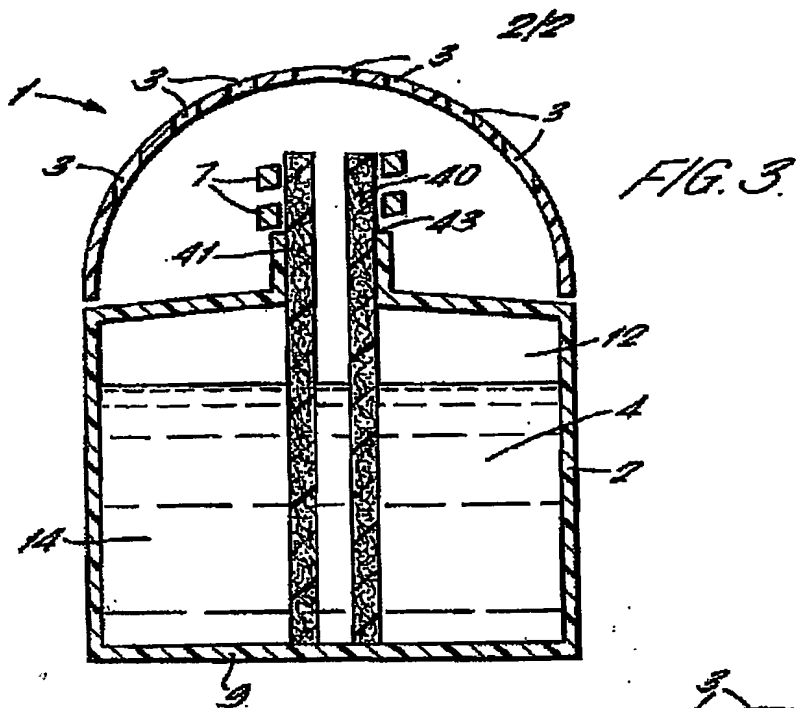

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.